



Dajulong No.5
PVC商用卷材地板

DajuLong[®]
大巨龙弹性地板

Dajulong No.5

PVC商用卷材地板



Description 规格	Standard 标准	Result 结果
Total thickness 总厚度	EN 428	2.0 mm
Wear layer thickness 耐磨层	EN 429	0.35 mm
Width 宽度	EN 426	2 m
Length of sheet 卷长	EN 426	20 m

Classification 类别		
Fire rating 防火等级	GB 8624-2012	B1
Toxic testing 有害物质检测	GB 18586-2001	Good 合格
Electrical resistance 抗电阻性	EN 1081	>10 ⁹⁻¹⁰
Slip resistance dry 防干滑性	EN 13893	≥0.3
Slip resistance wet 防湿滑性	EN 51 130	R9

Performances 性能		
Abrasion group 耐磨等级	EN 649	T
Castor chair test 轮压测试	EN 425	No damage 合格
Colour fastness 颜色稳定性	EN ISO 105 - B02	≥6
Chemical products resistance 抗化学性	EN 423	Good 好
Dimensional stability 尺寸稳定性	EN 434	≤0.40%
Curl resultant to heat 加热翘曲	EN 434	≤1 mm
Sound reduction 消音率	EN ISO 717/2	Approx. 4 dB
Residual Indentation 残余凹陷度	EN 433	0.03 mm
Anti-bacterial and fungicidal 抗菌防霉性能		Good 好
VOC 挥发物排放量		<10
Surface treatment 表面处理		PUR

Dajulong No.5



Intertek抗菌检测报告


FloorScore环保检测报告

SGS防火检测报告



Dajulong No.5

Dimension: 2.0mm × 2.0m × 20m

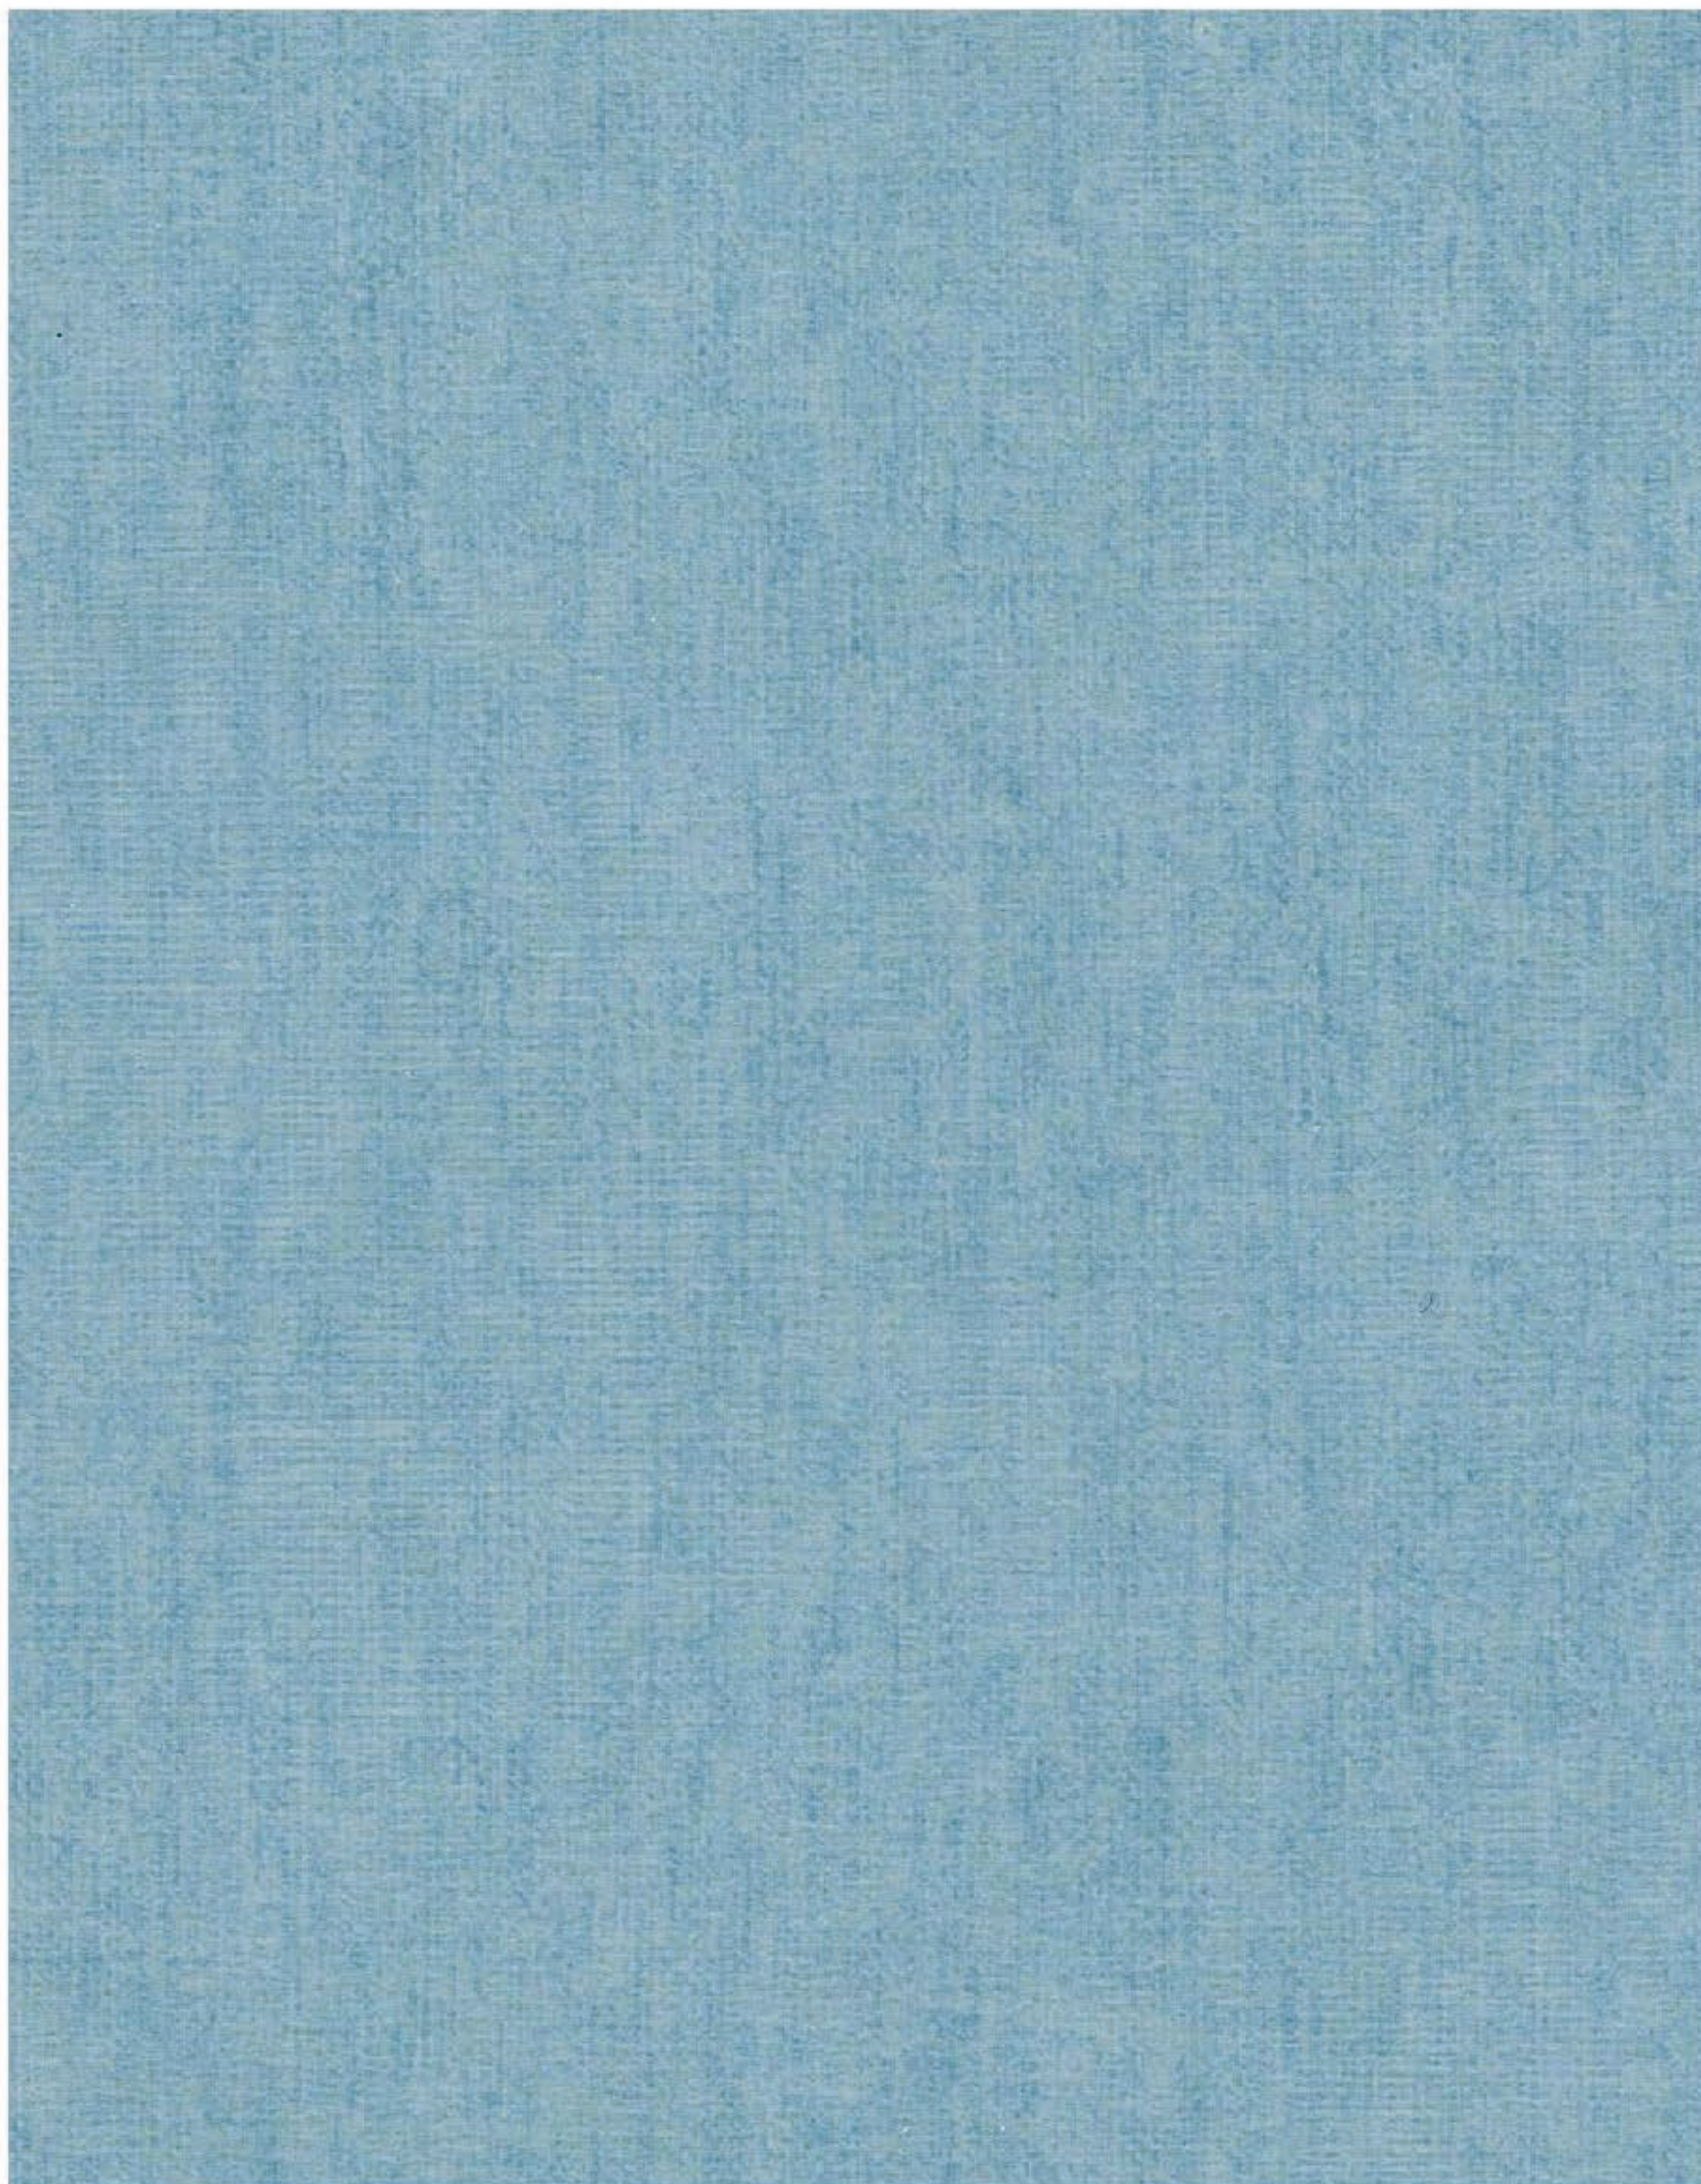

JL05-71

Dajulong No.5


Dimension: 2.0mm × 2.0m × 20m



JL05-02



JL05-03

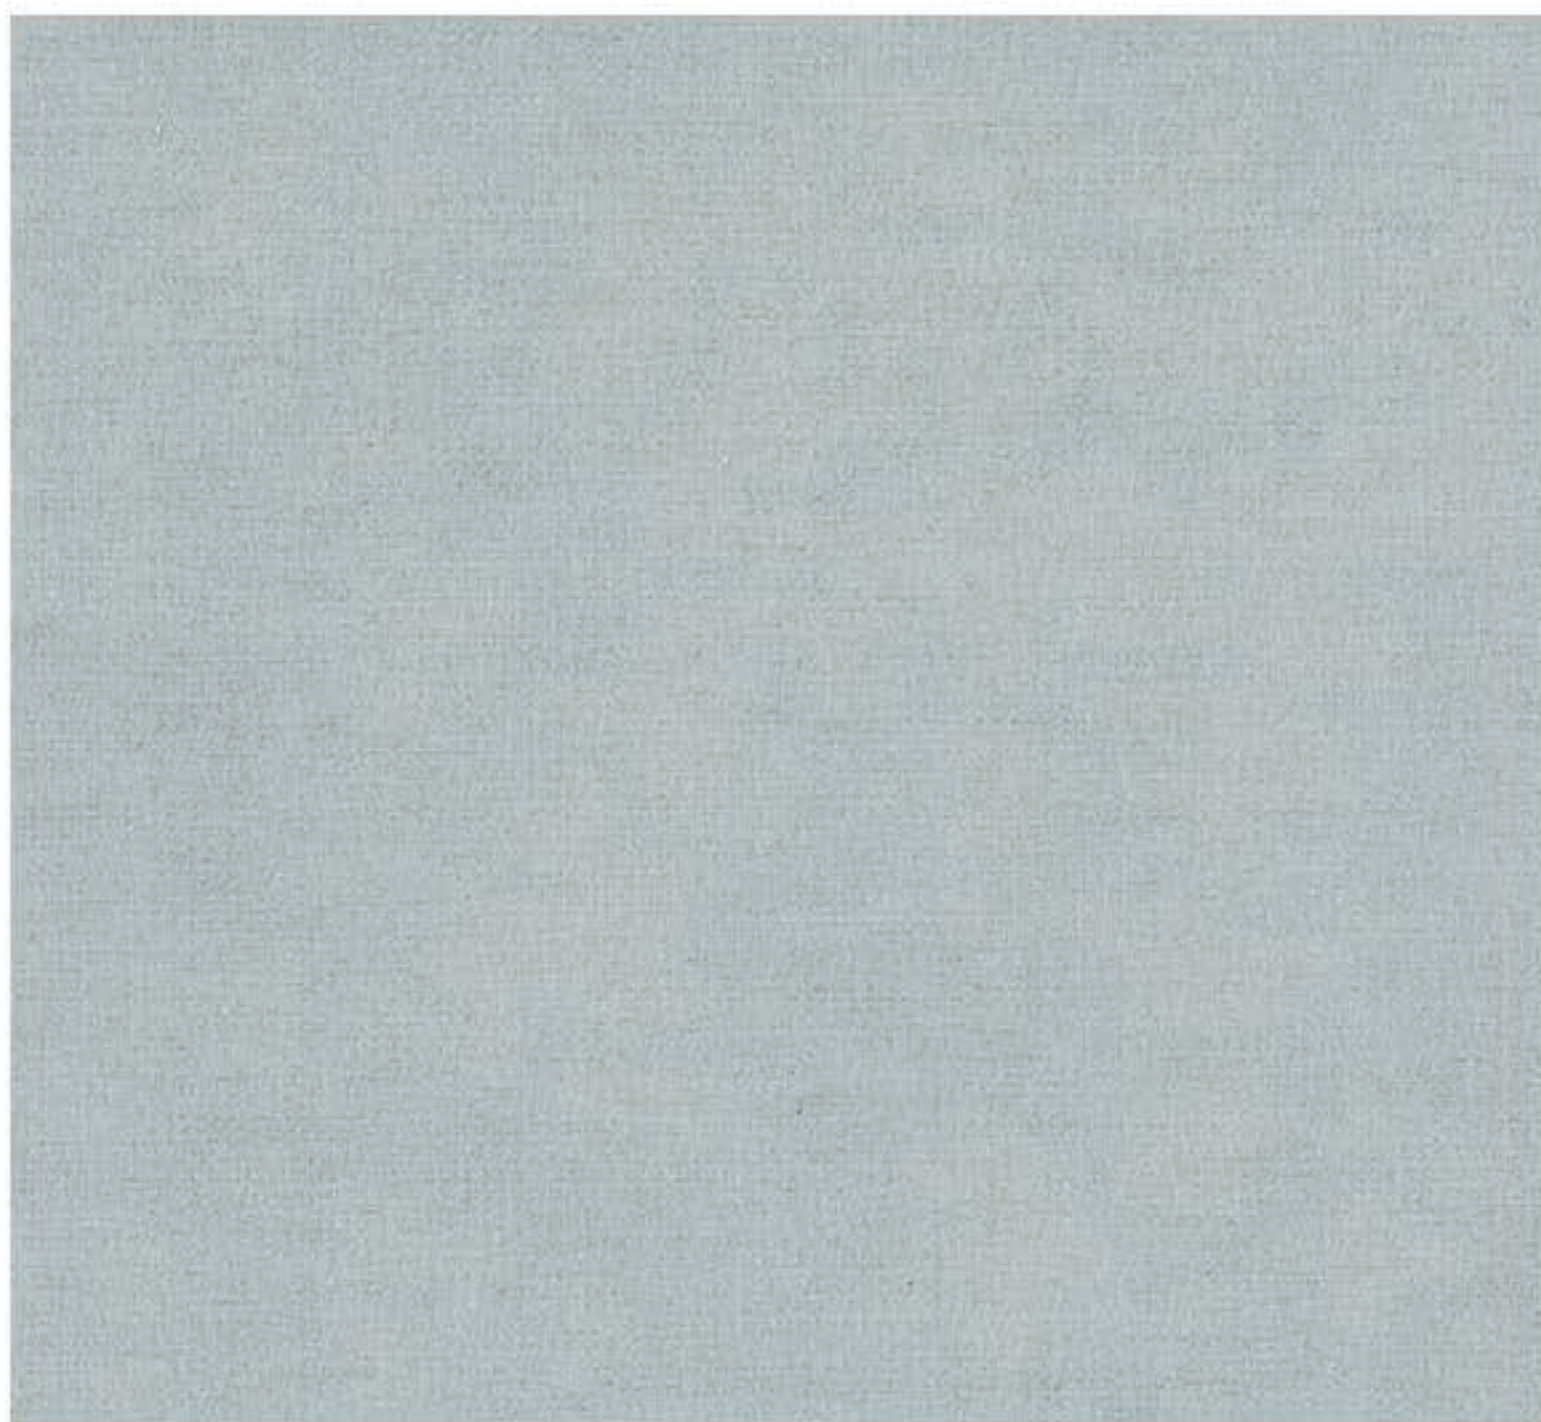

JL05-01



JL05-04



JL05-05

Dajulong No.5

规格: 2.0mm × 2.0m × 20m



JL05-12



JL05-13



JL05-11



JL05-21



JL05-31



Dajulong No.5

Dimension: 2.0mm × 2.0m × 20m



JL05-41




JL05-42



JL05-51



JL05-52

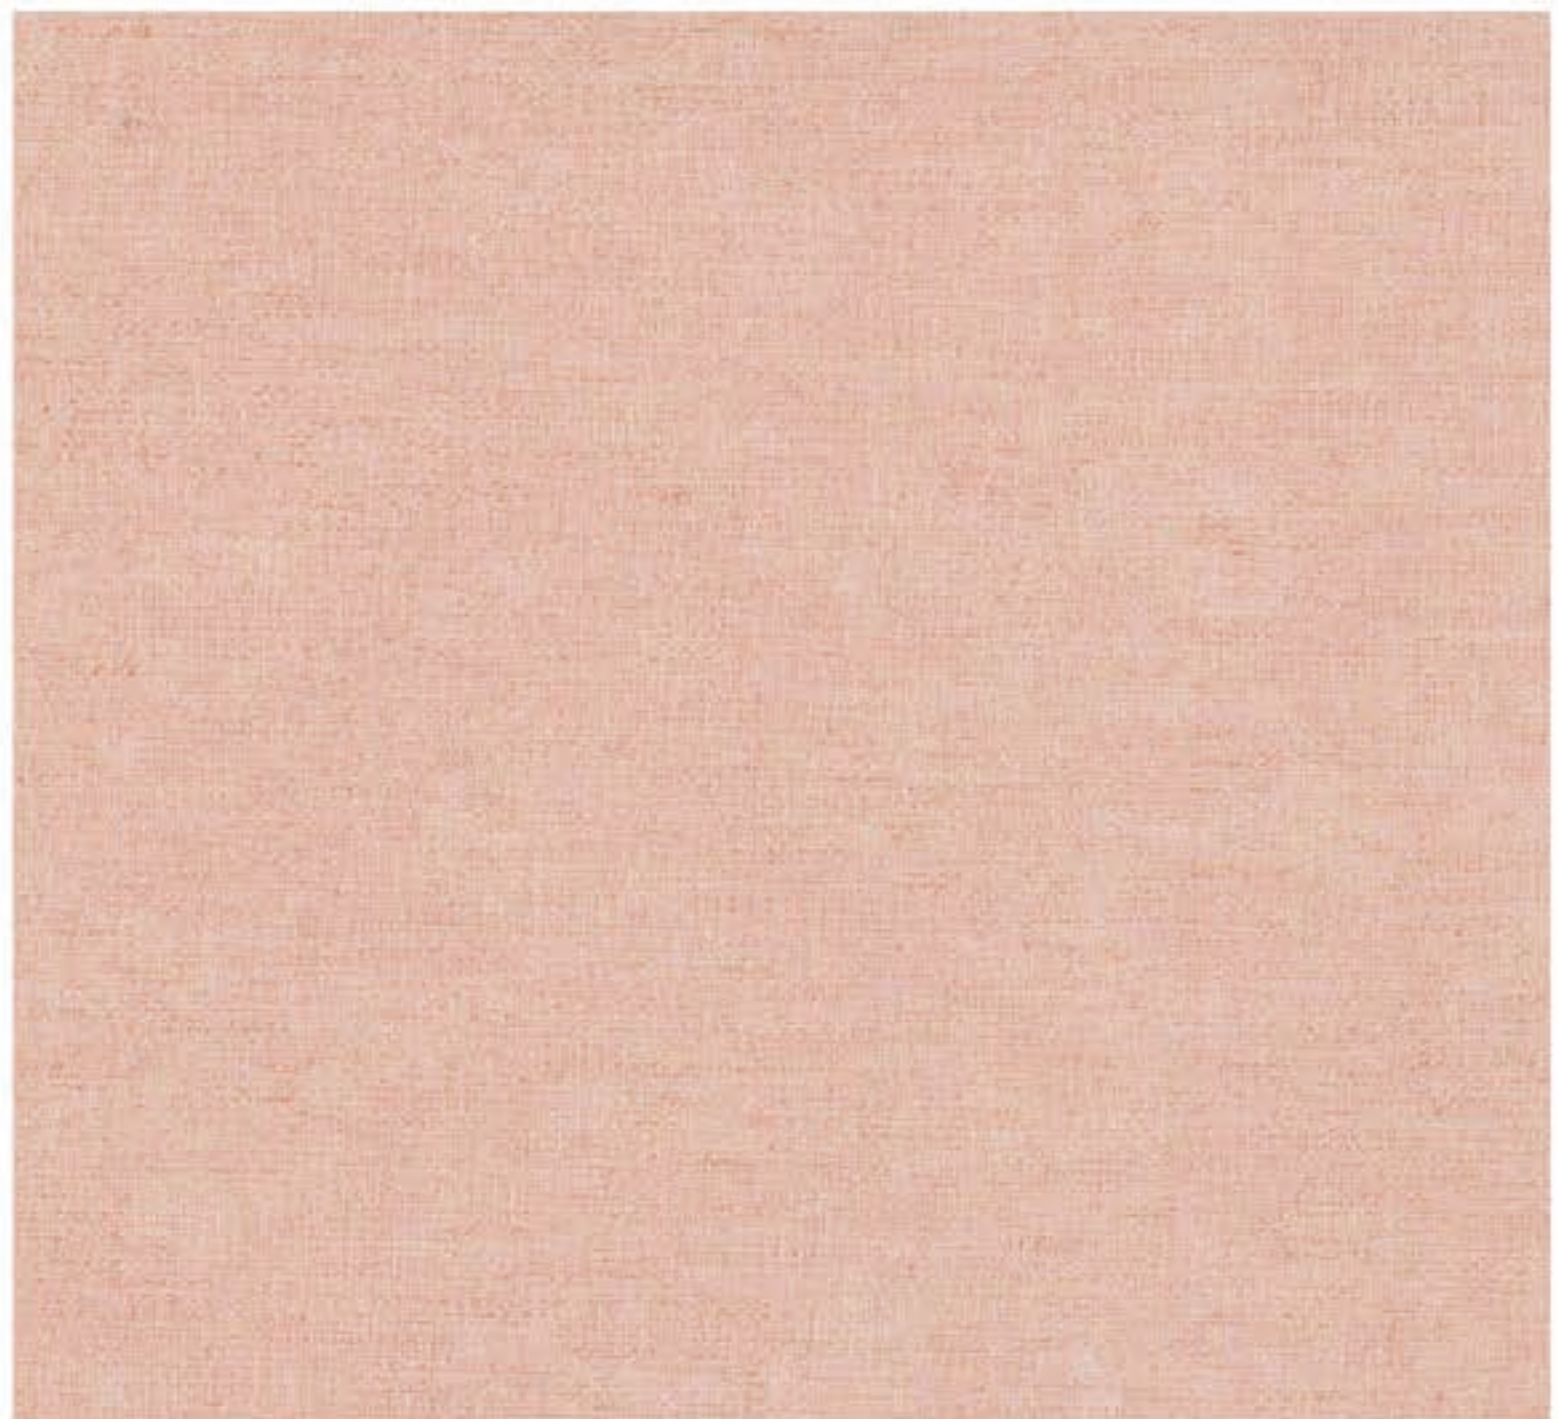

JL05-61